

S.M.P.S

LED Converter

Water Proof Converter

# 40W1 Series

40W single output  
with constant voltage circuit



- Constant voltage design(C.V. mode)
- AC Input voltage 90-132V
- Protections:  
Over load/Over voltage /Short circuit
- IP67 design for outdoor installations
- 100% full load burn-in test
- Suitable for LED lighting and moving sign applications
- Plastic case
- Class 2 power unit
- Safety standards : UL879
- EMC standards : FCC Part 15 classB
- 3years warranty

IP68     SELV LPS  


ITEM		UP40S12W1
INPUT	VOLTAGE RANGE	AC90~132V
	FREQUENCY RANGE	47~63Hz
	EFFICIENCY(typ.)	80%
	AC CURRENT(typ.)	0.7A/100VAC
	INRUSH CURRENT(typ.)	COLD START 20A/100VAC
OUTPUT	DC VOLTAGE	12V
	RATED CURRENT	3.33A(2.49A@50℃)
	RATED POWER	40W
	RIPPLE&NOISE(max.) Note2	170mVp-p
	VOLTAGE ADJ. RANGE	±5%
	VOLTAGE TOLERANCE Note3	±3%
	LINE REGULATION Note4	±1%
	LOAD REGULATION Note5	±2%
	SETUP,RISE TIME(max.)	3000ms,100ms/100VAC at full load
	HOLD UP TIME(typ.)	10ms/100VAC at full load
PROTEC-TION	SHORT CIRCUIT	Hiccup mode ; recovers automatically after fault condition is removed
	OVERLOAD	Over 110% of rating ; recovers automatically after fault condition is removed
	OVER VOLTAGE	115~140% of rating
ISOLA-TION	WITHSTAND VOLTAGE	I/P-O/P:AC3KV
	ISOLATION RESISTANCE	I/P-O/P:DC500V 100Mohms(At room temp. & humid.)
ENVIRON-MENT	WORKING TEMP.&HUMID.	-40~+50℃ (Refer to "DERATING CURVE"),20~95%RH
	STORAGE TEMP.&HUMID.	-40~+75℃,10~95%RH
	VIBRATION	10~500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes
OTHERS	DIMENSION/WEIGHT	146.5*42*35mm(L*W*H)/0.3kg
NOTE	<p>1. All parameters not specially mentioned are measured at 220Vac input, rated load and 25℃ of ambient temperature.</p> <p>2. Ripple &amp; noise are measured at 20MHz of bandwidth by using a 12" twisted pare-wire terminated with 0.1 uF &amp; 47uF parallel capacitor.</p> <p>3. Tolerance : includes set up tolerance, line regulation and load regulation.</p> <p>4. Line regulation is measured from low line to high line at rated load.</p> <p>5. Load regulation is measured from low 0% to 100% rated load.</p>	

S.M.P.S


LED Converter

Water Proof Converter


## BLOCK DIAGRAM

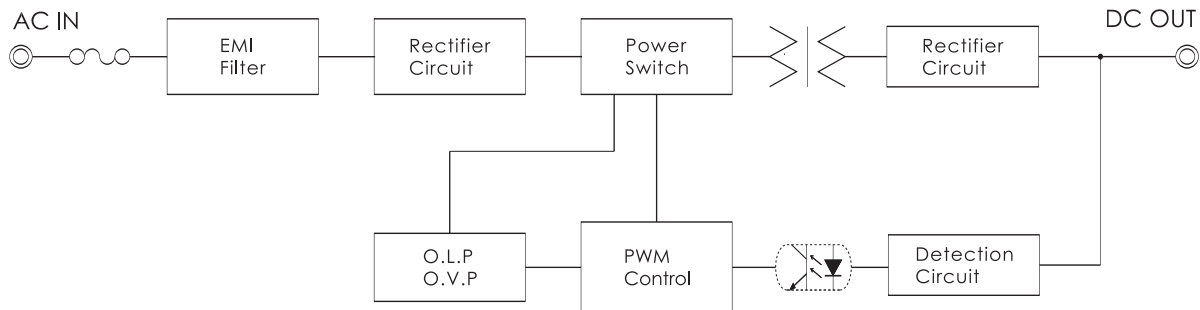

## DIMENSIONS(unit:mm)

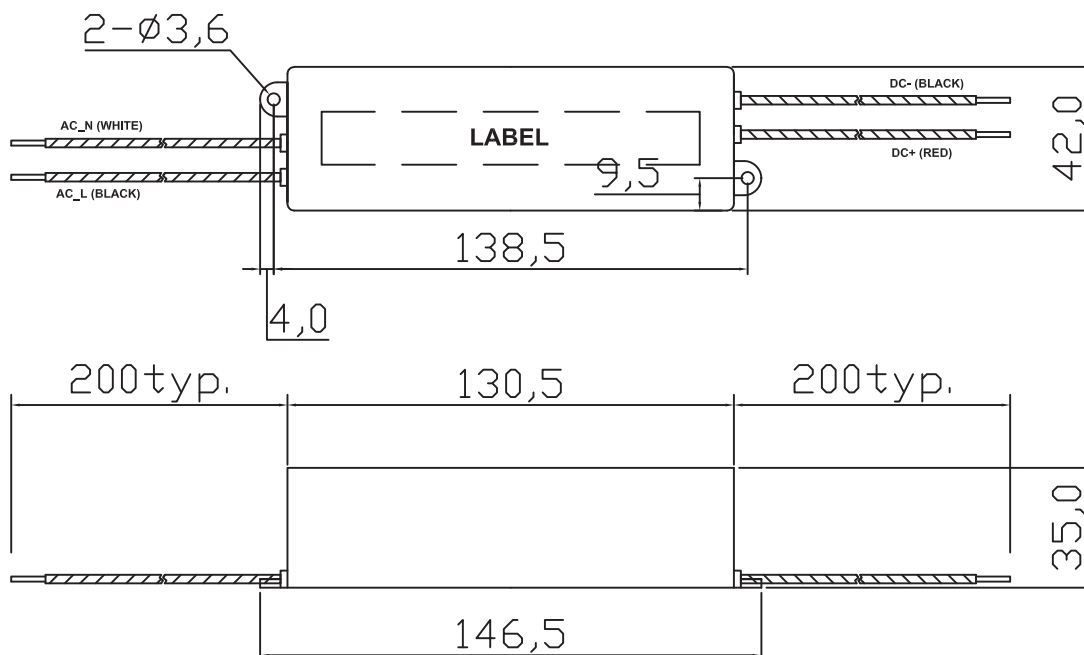

## DERATING CURVE

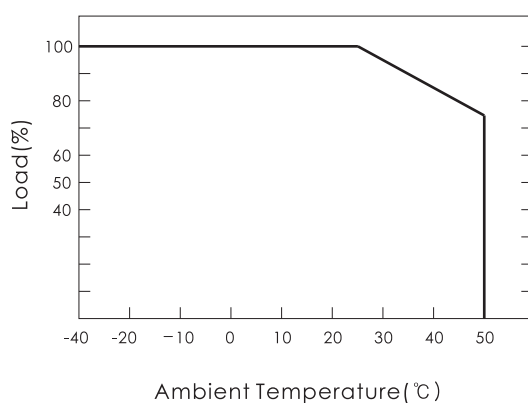

## STATIC CHARACTERISTICS

