

S.M.P.S

LED Converter

Water Proof Converter

F125CT2 Series

125W single output with C.C circuit
and PFC function



- **Constant current design(C.C. mode)**
- Built-in PFC function
- Protections: Over current / Short circuit
- IP68 design for outdoor installations
- 100% full load burn-in test
- 3 in 1 dimming function(option:D type)
- Suitable for LED lighting and street lighting applications
- Safety standards : K61347-2-1, K61347-2-13
- EMC standards : K00015, K61547, K61000-3-2, 3
- Metal case

UPF125S20CT2□


Blank : IP68 rated. Cable for I/O connection.

Output voltage and current level can be adjusted through internal potentiometer

D(option) : IP68 rated. Constant current level adjustable through output cable with 10V PWM signal or 1-10Vdc or resistance

IP68     SELV   

ITEM		UPF125S20CT2□	UPF125S24CT2□
INPUT	VOLTAGE RANGE	AC180~264V	
	FREQUENCY RANGE	47~63Hz	
	POWER FACTOR	PF>0.95 at full load	
	THD(max.)	20%(@Dimming 1V~10V)	
	EFFICIENCY(typ.)	92%	93%
	AC CURRENT(typ.)	0.56A/230VAC	0.55A/230VAC
	INRUSH CURRENT(typ.)	40A/230VAC	40A/230VAC
	LEAKAGE CURRENT	<2.5mA / 230VAC	<2.5mA / 230VAC
OUTPUT	RATED CURRENT	5.8A	4.8A
	CONSTANT CURRENT REGION	14-20V	18-24V
	RATED POWER	116W	115W
	CURRENT ADJ. RANGE	4.0~5.8A	3.2~4.8A
	CURRENT ACCURACY	±5%	
	RIPPLE&NOISE(max.) Note2	150mVp-p	
	SETUP,RISE TIME(max.)	3000ms,100ms/230VAC at full load	
	HOLD UP TIME(typ.)	15ms/230VAC at full load	
PROTEC-TION	OVER CURRENT Note3	95~108%	
	SHORT CIRCUIT	Hiccup mode ; recovers automatically after fault condition is removed	
	OVER TEMPERATURE	Dimming down 70% at TC 80℃	
ISOLA-TION	WITHSTAND VOLTAGE	I/P-O/P:AC3KV, I/P-F.G:AC1.5KV, O/P-F.G:AC0.5KV	
	ISOLATION RESISTANCE	I/P-O/P, I/P-F.G, O/P-F.G:DC500V 100Mohms(At room temp. & humid.)	
ENVIRON-MENT	WORKING TEMP.&HUMID.	-40~+70℃(Refer to "DERATING CURVE),20~95%RH	
	STORAGE TEMP.&HUMID.	-40~+80℃,10~95%RH	
	VIBRATION	10~500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes	
OTHERS	DIMENSION/WEIGHT	224*55.5*37.3mm(L*W*H)/0.77Kg	
NOTE	1. All parameters not specially mentioned are measured at 230vac input, rated load and 25℃ of ambient temperature. 2. Ripple & noise are measured at 20MHZ of bandwidth by using a 12" twisted pare-wire terminated with 0.1 uF & 47uF parallel capacitor. 3. Refer to "DRIVING METHODS of LED MODULE"		

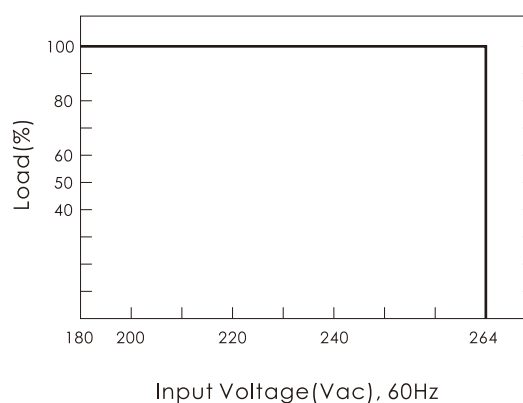

S.M.P.S

LED Converter

Water Proof Converter

■ DIMMING OPERATION

● Built-in 3 in 1 dimming function.

Output constant current level can be adjusted through output cable by connecting 10V PWM signal or 1-10Vdc or resistance between DIM+ and DIM-.

● Please do not connect 'DIM-' to 'V-'

● 10V PWM signal for output current adjustment (typ.):

frequency range: 100Hz~3KHz

Duty Value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	Open
Percent of Rated Current	5~20%	15~25%	25~35%	35~45%	45~55%	55~65%	65~75%	75~85%	85~95%	95~105%	95~108%

● 1-10V dimming function for output current adjustment (typ.)

Dimming Value	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	Open
Percent of Rated Current	5~20%	15~25%	25~35%	35~45%	45~55%	55~65%	65~75%	75~85%	85~95%	95~105%	95~108%

● Reference resistance value for output current adjustment (typ.)

Resistance Value	Single driver	10K Ω	20K Ω	30K Ω	40K Ω	50K Ω	60K Ω	70K Ω	80K Ω	90K Ω	100K Ω	Open
	Multiple driver (N=driver quantity for synchronized dimming operation)	10K Ω /N	20K Ω /N	30K Ω /N	40K Ω /N	50K Ω /N	60K Ω /N	70K Ω /N	80K Ω /N	90K Ω /N	100K Ω /N	---
Percent of Rated Current		5~20%	15~25%	25~35%	35~45%	45~55%	55~65%	65~75%	75~85%	85~95%	95~105%	95~108%