# **16WQ Series**

16W single output with constant voltage circuit



- Constant voltage design(C.V. mode)
- AC Input voltage 90-277V
- Protections:

Over load/Over voltage /Short circuit

- IP68 design for outdoor installations
- 100% full load burn-in test
- Suitable for LED lighting and moving sign applications
- Plastic case
- Safety standards: EN61347-1,EN61347-2-13
- EMC standards: EN55022,EN61204-3,


EN61000-3-2,3,

3years warranty


## 


ITEM		UP16S12WQ	UP16S24WQ
INPUT	VOLTAGE RANGE	AC90~277V	
	FREQUENCY RANGE	47~63Hz	
	EFFICIENCY(typ.)	80%	80%
	AC CURRENT(typ.)	0.31A/115VAC 0.21/230VAC	
	INRUSH CURRENT(typ.)	COLD START 70A/230VAC	
ОИТРИТ	DC VOLTAGE	12V	24V
	RATED CURRENT	1.34A	0.67A
	RATED POWER	16W	
	RIPPLE&NOISE(max.) Note2	220mVp-p	
	VOLTAGE TOLERANCE Note3	±3%	
	LINE REGULATION Note4	±1%	
	LOAD REGULATION Note5	±2%	
	SETUP,RISE TIME(max.)	3000ms,100ms/230VAC at full load	
	HOLD UP TIME(typ.)	50ms/230VAC at full load	
PROTEC -TION	SHORT CIRCUIT	Hiccup mode ; recovers automatically after fault condition is removed	
	OVERLOAD	Over 110% of rating; recovers automatically after fault condition is removed	
	OVER VOLTAGE	Over 110% of rating; recovers automatically after fault condition is removed	
ISOLA -TION	WITHSTAND VOLTAGE	I/P-O/P:AC3KV	
	ISOLATION RESISTANCE	I/P-O/P: DC500V 100Mohms(At room temp. & humid.)	
ENVIRON -MENT	WORKING TEMP.&HUMID.	-40~+70°C (Refer to "DERATING CURVE"),20~95%RH	
	STORAGE TEMP.&HUMID.	-40~+75℃,10~95%RH	
	VIBRATION	10~500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes	
OTHERS	DIMENSION/WEIGHT	126.5*35.5*23.5mm(L*W*H)/115g	
NOTE	<ol> <li>All parameters not specially mentioned are measured at 230vac input, rated load and 25°C of ambient temperature.</li> <li>Ripple &amp; noise are measured at 20MHz of bandwidth by using a 12" twisted pare-wire terminated with 0.1 uf &amp; 47uf parallel capacitor.</li> <li>Tolerance: includes set up tolrance, line regulation and load regulation.</li> <li>Line regulation is measured from low line to high line at rated load.</li> </ol>		
	5. Load regulation is measured from low 0% to 100% rated load.		

#### ■ BLOCK DIAGRAM

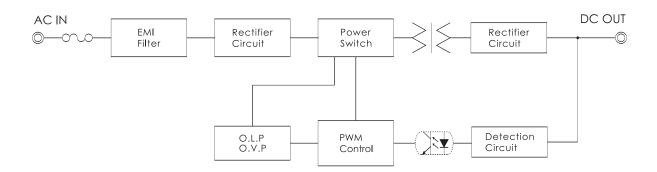


## ■ DIMENSIONS (unit:mm)

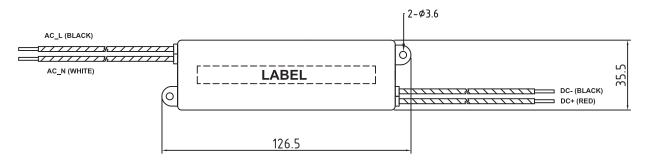


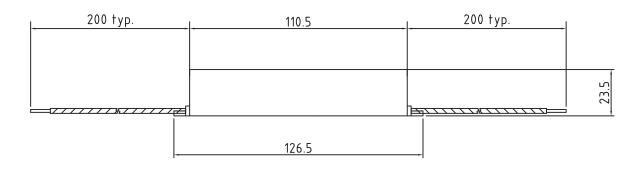

### ■ DERATING CURVE

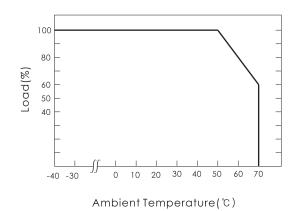

### ■ STATIC CHARACTERISTICS

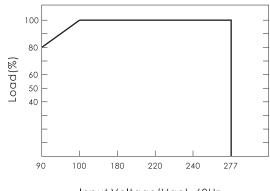

Input Voltage(Vac), 60Hz