# 300W2(V1) Series

300W single output with constant voltage circuit




- Constant voltage design(C.V. mode)
- AC Input voltage 160-277V
- Protections:
  - Over load/Over voltage /Short circuit /Over temperature
- IP68 design for outdoor installations
- 100% full load burn-in test
- Suitable for LED lighting and moving sign applications
- Metal case
- Safety standards: EN61347-1,EN61347-2-13 /K61347-1,K61347-2-13
- EMC standards: EN55022,EN61204-3, EN61000-3-2,3/K00015,K61547
- 3years warranty


## 


ITEM		UP300\$12W2(V1)	UP300S24W2(V1)
INPUT	VOLTAGE RANGE	AC160~277V	
	FREQUENCY RANGE	47~63Hz	
	EFFICIENCY(typ.)	85%	88%
	AC CURRENT(typ.)	2.05A/230VAC	
	INRUSH CURRENT(typ.)	COLD START 80A/230VAC	
	LEAKAGE CURRENT	<2mA / 230VAC	
OUTPUT	DC VOLTAGE	12V	24V
	RATED CURRENT	25A(18.75A@50℃)	12.5A(9.37A@50℃)
	RATED POWER	300W	300W
	RIPPLE&NOISE(max.) Note2	170mVp-p	290mVp-p
	VOLTAGE ADJ. RANGE	±5%	±5%
	VOLTAGE TOLERANCE Note3	±3%	±3%
	LINE REGULATION Note4	±1%	±1%
	LOAD REGULATION Note5	±2%	±2%
	SETUP,RISE TIME(max.)	3000ms,100ms/230VAC at full load	
	HOLD UP TIME(typ.)	15ms/230VAC at full load	
PROTEC -TION	SHORT CIRCUIT	Hiccup mode ; recovers automatically after fault condition is removed	
	OVERLOAD	Over 110% of rating ; recovers automatically after fault condition is removed	
	OVER VOLTAGE	115~140% of rating	
	OVER TEMPERATURE	$100\pm10^{\circ}\text{C(Temp. Sensor)} \; ; \; recovers \; automatically \; after fault \; condition \; is \; removed the condition of the c$	
ISOLA -TION	WITHSTAND VOLTAGE	I/P-O/P:AC3KV, I/P-F.G:AC1.5KV, O/P-F.G:AC0.5KV	
	ISOLATION RESISTANCE	I/P-O/P, I/P-F.G, O/P-F.G:DC500V 100Mohms(At room temp. & humid.)	
ENVIRON -MENT	WORKING TEMP.&HUMID.	-40~+70℃ (Refer to "DERATING CURVE"),20~95%RH	
	STORAGE TEMP.&HUMID.	-40~+75℃,10~95%RH	
	VIBRATION	10~500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes	
OTHERS	DIMENSION/WEIGHT	282*74*49mm(L*W*H)/1.45Kg	
NOTE	<ol> <li>All parameters not specially mentioned are measured at 230vac input, rated load and 25°C of ambient temperature.</li> <li>Ripple &amp; noise are measured at 20MHz of bandwidth by using a 12" twisted pare-wire terminated with 0.1 uF &amp; 47uF parallel capacitor.</li> <li>Tolerance: includes set up tolrance, line regulation and load regulation.</li> <li>Line regulation is measured from low line to high line at rated load.</li> <li>Load regulation is measured from low 0% to 100% rated load.</li> </ol>		

### ■ BLOCK DIAGRAM

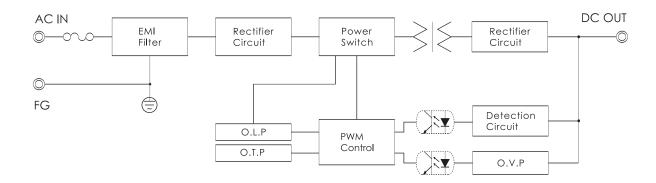


## ■ DIMENSIONS (unit:mm)

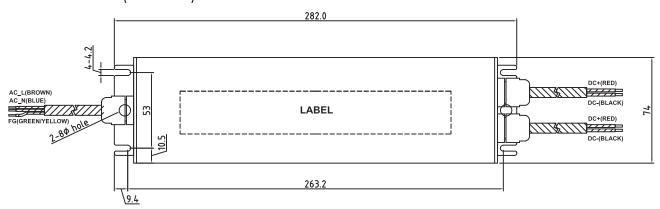


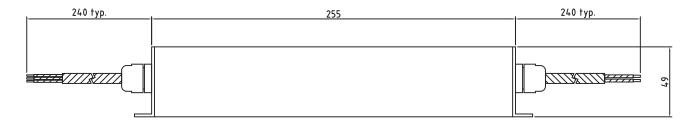

### ■ DERATING CURVE

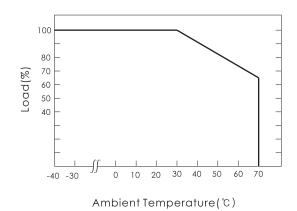

## ■ STATIC CHARACTERISTICS

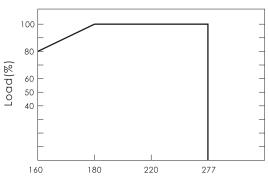

Input Voltage(Vac), 60Hz